

DEEP PENETRATING WATERBASED EXTERIOR LASUR



WHITE ASH

Kuas 1 / 1st Coat
AEL - 505 TWILIGHT TEAK

Kuas 2 / 2nd Coat
AEL - 505 TWILIGHT TEAK

Kuas 3 / 3rd Coat
AEL - 505 TWILIGHT TEAK

DATA TEKNIS / TECHNICAL DATA

Application

Recommended substrate	: Exterior tropical hardwood
Recommended condition	: 25 - 35° C, 40 - 60 % RH
Thinner	: Water if necessary
Coating amount (Wet)	: 60 - 70 g/m ² percoat
Theoretical Coverage	: 10 m ² /kg mix at CA 60 g/m ² percoat

Film Properties

Specification	Method	Result
Adhesion	ASTM D3359	Point 5B
Hot-Cold Test	ASTM D1211	10 cycles (good)
Household Chemical Resistance -ethanol (48%) -NH4OH (10%) -water -fat	ASTM D1308	Point 3 Point 5 Point 4 Point 5
Accelerated weathering test, QSUN after 1000 hours	ASTM D6595	Good

Drying time

● Dust Free	: 10 - 15 Minutes
● Tack Free	: 30 - 40 Minutes
● Hard Dry	: 180 - 240 Minutes

Recoating time

: After 2 hours

Stacking time

: 16 - 17 hours

Specification :

Solid content	: 25 ± 1 %
Viscosity, DIN4, 30°C	: 13 ± 5 sec
Specific gravity	: 1.04 ± 0.04 g/cc
Packaging	: 1 LT in can & 5 Lt in Galon
Shelf life	: 12 months

Untuk mendapatkan penampilan akhir yang gloss/
dof, kuaskan **ULTRAN AQUA LASUR AEL - 505**
Clear Gloss/Dof sebagai lapisan akhir.

For gloss/dof appearance, apply **ULTRAN AQUA**
LASUR AEL - 505 Clear Gloss/Dof for the top coat.

propan
The Paint Specialist



Hasil pewarnaan sangat tergantung dari jenis
kayu & cara aplikasinya.


*The colors on this color card may vary, depend on the
type of wood & application method.*




AEL - 505 CHRYSANT YELLOW




AEL - 505 SUNSET RED

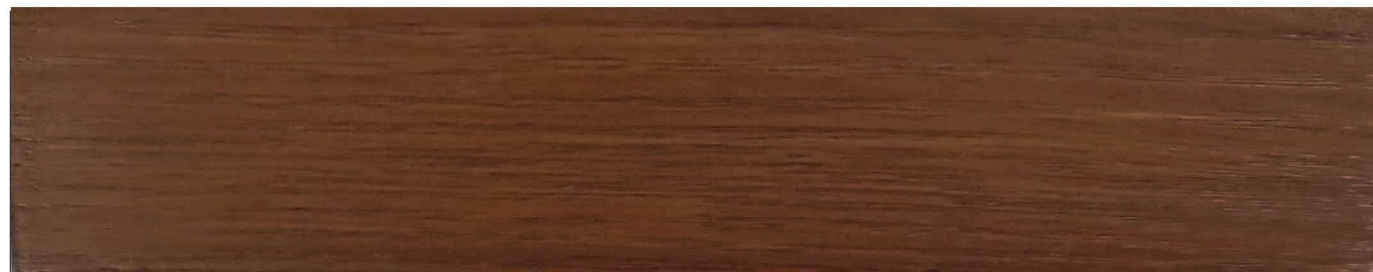

AEL - 505 TWILIGHT TEAK

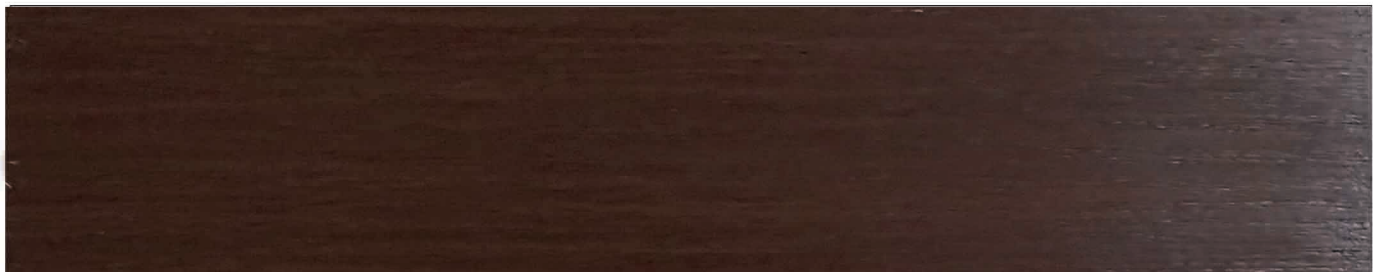

AEL - 505 DARK BROWN

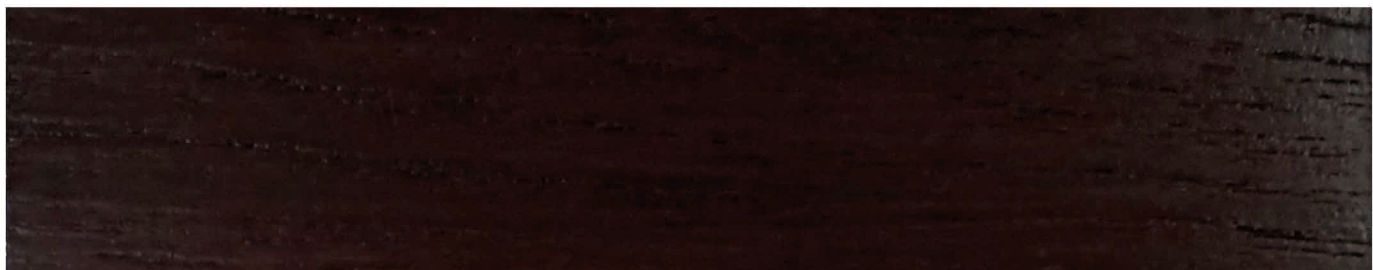

AEL - 505 AKASIA



AEL - 505 CLEAR GLOSS