

propan
The Paint Specialist




www.propanraya.com Propan Raya ICC

@propanraya 08111 381 686

B01-R01/USE/026082025/TON

Ultran Super Enamel Multipurpose clear 2K PU coating

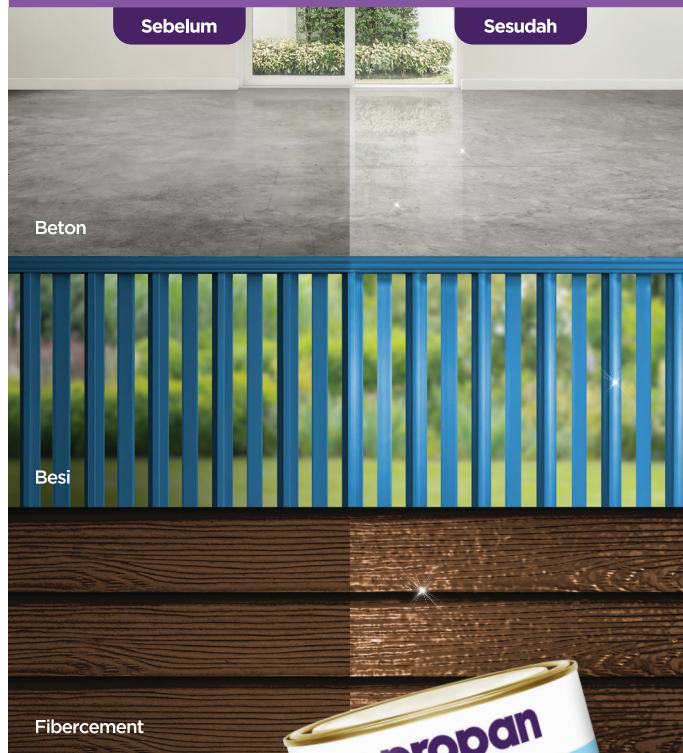

**solvent
based**

Ultran Super Enamel

USE-60

Cat transparan serbaguna berbasis polyurethane / PU (2 komponen). Dapat dipakai sebagai top coat transparan pada berbagai macam substrat seperti besi, beton, papan fiber cement, dll.

A multipurpose clear polyurethane / PU (two components) coating. Can be used as clear top coat on a wide variety of substrate such as steel/iron, concrete, fiber cement board, etc.

Tersedia dalam / Available in :
Clear Gloss & Clear Dof

Keunggulan / Advantages

- Tahan cuaca, lumut dan jamur
Weather, algae and fungus resistant
- Tahan abrasi
Abrasion resistant
- Tahan percikan bahan kimia rumah tangga
Splash mild chemical resistant
- Tidak menguning dan mengapur
Non-yellowing & non-chalking
- Ketahanan kilap yang sangat baik
Excellent gloss resistance
- Mudah dibersihkan
Easy to clean

Data Teknis

Rasio campuran	: Komponen A : Komponen B = 4 : 1
Kadar padatan (v/v)	: 45 ± 1%
Daya sebar	: 9 - 10 m ² /lt-set Ketebalan film kering = 40 mikron
Pengencer	: Propan Thinner Polyurethane / PU MD 02
Rasio pengenceran (volume)	: Airless spray = 5% Spray = 40% Kuas/rol = 20%
Umur campuran (30°C)	: 180 menit
Waktu kering (30°C)	: Surface dry = 30 menit Hard dry = 5 jam
Waktu pengecatan ulang (30°C)	: 4 - 6 jam, setelah lapisan film pertama kering
Kemasan	: 1lt-set

Tahapan Aplikasi / Application Method

1. Bersihkan permukaan yang akan dicat dari debu, karat, minyak atau kotoran lainnya.
Clean the surface of substrate from dust, rust, oil and other contaminant.
2. Aduk rata ULTRAN SUPER ENAMEL komponen A, tambahkan hardener / komponen B, dengan perbandingan volume 4 : 1. Aduk kembali hingga rata.
Stir thoroughly component A ULTRAN SUPER ENAMEL, add hardener / component B, with volume ratio 4 : 1. Then stir thoroughly.
3. Tambahkan thinner Polyurethane / PU MD-02 sesuai kebutuhan aplikasi, aduk hingga rata.
Add thinner Polyurethane / PU MD-02 according to application requirement, then stir thoroughly.
4. Jangan aplikasikan campuran cat ini jika sudah melewati umur campuran (180 menit).
Do not apply this paint mixture after 180 minutes.
5. Aplikasikan campuran ULTRAN SUPER ENAMEL ini dengan menggunakan kuas / spray / rol.
Apply this paint mixture ULTRAN SUPER ENAMEL by brush / spray / roll.
6. Biarkan mengering minimal 4 jam, sebelum melakukan aplikasi lapisan kedua (tergantung suhu dan kelembapan udara).
Leave it dry for a minimum of 4 hours, before applying the second layer (depends on air temperature and humidity).

Technical Data

Mixing ratio	: Component A : Component B = 4 : 1
Solid by volume (v/v)	: 45 ± 1%
Theoretical coverage	: 9 - 10 m ² /lt-set Dry film thickness = 40 microns
Thinner	: Propan Thinner Polyurethane / PU MD 02
Thinning ratio (volume)	: Airless spray = 5% Spray = 40% Brush/roll = 20%
Pot life (30°C)	: 180 minutes
Drying time (30°C)	: Surface dry = 30 minutes Hard dry = 5 hours
Re-coating interval (30°C)	: 4 - 6 hours, after the first coating film already dry
Packaging	: 1 lt-set